

Fiber Optic & Networking Products

Product Specification

10/100/1000M Unmanaged Industrial Ethernet Switches

(FLD-S-1G1G-I)

This unmanaged industrial Ethernet switch FLD-S-1G1G-I is designed to match the critical industrial standards. With reliable and simple operation against vibration and shock, and wide operation temperature range, it could match a variety of harsh environment. The switch complies with CE,FCC and RoHS standards, and passed the 100% burning test to ensure that it will fulfill the needs of industrial applications. It is a good choice for an economical solution for industrial Ethernet connections.

Features & Benefits 1 1000Base-T(X) ports and 1 1000Base-FX port -40℃-85℃ operating temperature range Super lightening protection, IP40 protection Excellent heat elimination without cooling fan

Physical Characteristics ❖ Housing: Aluminum Alloy material with IP40 Protection ❖ Dimension: 138mm(L) X 112mm(W) X 42mm(H) ❖ Weight: 480g ❖ Installation: Din-Rail mounting, Wall mounting

Let's create a pure fiberland for human beings



Fiber Optic & Networking Products

Switch Properties

- MAC Table Size: 1K
- Packet Buffer Size: 1M bit
- Processing Type: Store and Forward
- Exchange Properties: 148800pps (1000M)

Interfaces

- 1 1000Base-FX port (SC/ST/FC/LC connectors optional)
- ❖ 1 RJ45 Ports: 1000Base-T(X) auto negotiation

Power

- ❖ Input Voltage: 24V DC(18-36VDC) Redundant dual inputs
- ❖ Input Current: <0.5A @24VDC</p>
- Overload Current Protection: Present
- Reverse Polarity Protection: Present
- * Redundant Protection: Present

Environmental Limits

- ❖ Operating Temperature: -40°C-85°C
- Storage Temperature: -40℃-85℃
- ❖ Ambient Relative Humidity: 5%-95% (non-condensing)

Standards

- SEMS:
 - > EN61000-4-2 (ESD), Level 3
 - > EN61000-4-3 (RS), Level 3
 - > EN61000-4-4 (EFT), Level 3
 - > EN61000-4-5 (Surge), Level 3
 - > IEC61000-4-8(100A/m), Level 3
 - > IEC61000-4-11, Level 3
- Shock: IEC 60068-2-27

FIBERLAND


Fiber Optic & Networking Products

Let's create a pure fiberland for human beings

*	Free Fall: IEC 60068-2-32
*	Vibration: IEC 60068-2-6
*	EMI: FCC CFR47 Part 15, EN55022/CISPR22, Class A
*	Industry: IEC61000-6-2
*	Rail: EN50155, EN50121-4
*	Traffic: NEMA TS-2

Warranty 5 years

Dimension: FLD-S-1G1G-I

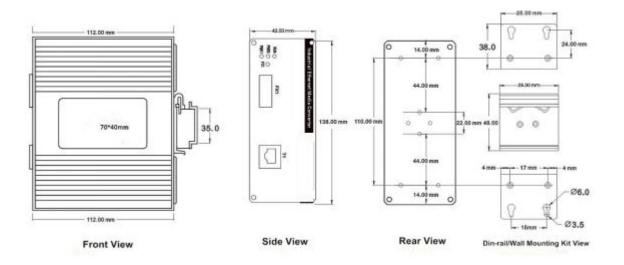

Contact:

Address	6th floor ,building 8,Zhongxing industrial zone,Nanshan district,Shenzhen,P.R.China
Zip	518000
Website	www.fiberlandtec.com
Email	sales@fiberlandtec.com