

#### Fiber Optic & Networking Products

# **Product Specification**

# 10/100/1000M Unmanaged Industrial Ethernet Switches (FLD-S-6GE-I)

Introduction	Image
This unmanaged industrial Ethernet switch FLD-S-6GE-I is designed to match the critical industrial standards. With reliable and simple operation against vibration and shock, and wide operation temperature range, it could match a variety of harsh environment.  The switch complies with CE, FCC and RoHS standards, and passed the 100% burning test to ensure that it will fulfill the needs of industrial applications. It is a good choice for an economical solution for industrial Ethernet connections.	FC CE ROHS

Features & Benefits	
6 10/100/1000Base-T(X) ports	
-40°C-85°C operating temperature range	
Super lightening protection, IP40 protection	
Excellent heat elimination without cooling fan	

Physical Characteristics	
Housing: Aluminum Alloy material with IP40 Protection	
Dimension: 138mm(L) X 112mm(W) X 60mm(H)	
Weight: 670g	
Installation: Din-Rail mounting, Wall mounting	



#### **Fiber Optic & Networking Products**

#### Let's create a pure fiberland for human beings

#### **Switch Properties**

MAC Table Size: 8K

Packet Buffer Size: 1M bit

Processing Type: Store and Forward

Exchange Properties: 1488000pps (1000M)

#### **Interfaces**

6 RJ45 Ports: 10/100/1000Base-T(X) auto negotiation

#### **Power**

Input Voltage: 24V DC(18-36VDC) Redundant dual inputs

Input Current: <0.5A @24VDC

Overload Current Protection: Present

Reverse Polarity Protection: Present

Redundant Protection: Present

#### **Environmental Limits**

Operating Temperature: -40 °C -85 °C

Storage Temperature: -40°C-85°C

Ambient Relative Humidity: 5%-95% (non-condensing)

#### **Standards**

EMS:

EN61000-4-2 (ESD), Level 3

EN61000-4-3 (RS), Level 3

EN61000-4-4 (EFT), Level 3

EN61000-4-5 (Surge), Level 3

IEC61000-4-8(100A/m), Level 3

IEC61000-4-11, Level 3

Shock: IEC 60068-2-27

# FIBERLAND

#### Fiber Optic & Networking Products

# Let's create a pure fiberland for human beings

Free Fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

EMI: FCC CFR47 Part 15, EN55022/CISPR22, Class A

Industry: IEC61000-6-2


Rail: EN50155, EN50121-4

Traffic: NEMA TS-2

## Warranty

5 years

#### **Dimension FLD-S-6GE-I**

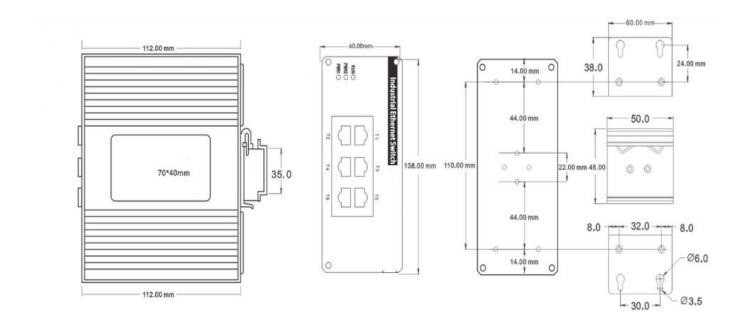

### **Contact:**

Address	6th floor ,building 8,Zhongxing industrial zone,Nanshan district,Shenzhen,P.R.China
Zip	518000
Website	www.fiberlandtec.com
Email	sales@fiberlandtec.com